


PRODUCT DATA SHEET

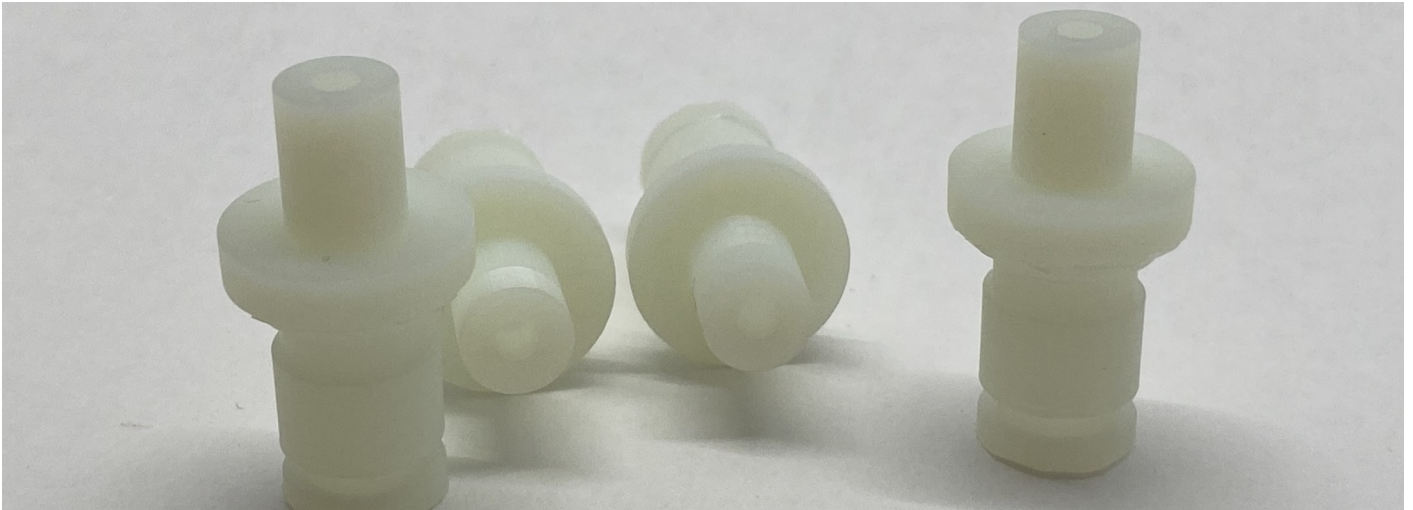

3DLite[®] BIO 308 GP WHITE

3D PRINT RESIN (DLP)

Well-Balanced Performance with Biocompatibility

HIGH PERFORMANCE PHOTOPOLYMER

Founded in 1986, SDC Technologies, Inc. (SDC) is the global leader of premium coatings. SDC's established technical experience and capability in UV-cure materials gave birth to the development in DLP/SLA 3D printing material. Utilizing a state-of-the-art adaptive manufacturing scientific lab, SDC's team of experienced chemists and polymer engineers have developed a range of engineering/production grade photopolymer resins under the 3DLite[®] brand. SDC is certified to ISO 9001:2015 (Quality) and ISO 14001:2015 (Environmental) standards.

PREMIUM FUNCTIONAL RESINS

With more than 38 years of product innovation, SDC's proprietary technologies are trusted by the world's most prestigious brands. 3DLite resins were designed to enhance your production process by improving the quality of your products while reducing cost at the same time.

PRODUCT OVERVIEW

3DLite BIO 308 GP WHITE delivers a well-rounded performance with a certified biocompatibility for skin contact. Uniquely formulated for medical device and wearable devices prototyping and other high-performance applications where extremely smooth surface quality and consistent repeatability are required.

PERFORMANCE FEATURES

- Well-balanced resin for medical and wearable device prototypes
- Biocompatibility Certified for extended skin contact (ISO10994-3-5)
- Extremely smooth surface with minimal post processing
- Excellent product durability and stability
- No additional thermal curing/post-processing required

APPLICATIONS

- Medical device prototyping
- Surgical tools
- Wearable devices
- Consumer goods
- Cosmetic prototypes

3DLite® BIO 308 GP WHITE

3DLite® BIO 308 GP WHITE	METRIC	METHOD
Tensile Strength	31 MPa	ASTM D638
Tensile Modulus	1.6 GPa	ASTM D638
Elongation	8%	ASTM D638
Flexural Strength @ max. load	50 MPa	ISO 178
Flexural Modulus	1.3 GPa	ISO 178
IZOD Impact Strength (notched)	20 J/m	ASTM D256
Heat Deflection Temp @ 1.80 MPa	36 °C	ISO 75
Heat Deflection Temp @ 0.45 MPa	53 °C	ISO 75
Shore D Hardness	85	ASTM D2240
Glass Transition Temperature	80 °C	DMA
Viscosity	1225 CPS	Brookfield viscometer @ 25 °C
Specific Gravity	1.13 g/cm ³	ASTM D792

1. Material properties can vary with part geometry, print orientation, print settings and temperature.
2. Data was obtained from parts printed using B9Creations Core 550, washed in IPA for 20 minutes and post-cured with Form-Cure at room temperature for 60 minutes.

To the best of our knowledge the information contained herein is accurate. However, SDC Technologies, Inc. makes no warranty, expressed or implied, regarding the accuracy of these results to be obtained from the use thereof.

SDC TECHNOLOGIES, INC. – USA

Corporate Headquarters, North America
T: +1-714-939-8300
F: +1-714-939-8330
customerca@sdctech.com

SDC TECHNOLOGIES – CHINA

China Office
T: +86-21-61517768
F: +86-21-61304925
customerca.cn@sdctech.com

SDC TECHNOLOGIES –EU

European Office
T: +44-1633-627030
customerca.eu@sdctech.com

SDC TECHNOLOGIES ASIA PACIFIC, PTE. LTD.

Singapore Office
T: +65-6210-6355
F: +65-683-3536
customerca.ap@sdctech.com



High Performance Chemistry™ is a trademark, and 3DLite® is a registered trademark of SDC Technologies, Inc.
©2024 SDC Technologies, Inc. All rights reserved. SDC is a wholly-owned subsidiary of Mitsui Chemicals, Inc.

